



HDF
**TNR delivers speed, efficiency,
affordability & versatility.**

High performance springless fabric doors for high traffic, interior applications. Low operating costs with virtually no maintenance costs.



***Tough 'n' Ready
For Your Challenging
Environments***

HDF High Performance Interior Fabric Door

High performance, high speed, high traffic doors for interior access and environmental separation.


TNR® Mechanical Features

- 18, 40 or 88 oz vinyl fabric with polyester core weave. Flexible and resistant to abusive environments.
- 88 oz fabric is FDA approved.
- Pre-assembled door header and curtain on end plates, allows for a quick and easy installation.
- Sleek profile allows reduced installation clearance.
- Impactable & Self Repairing: aluminum bottom bar releases upon impact and will auto reset. Eliminates downtime.
- Emergency manual chain hoist.
- No hinges, cables, pulleys or counterbalance springs.
- High speed operation conserves energy, reduces climate fluctuations.
- Ideal for environmental separation.
- Wireless reversing edge. Thru-beam photo eyes.
- Full width vision panel provides excellent visibility and safety.
- Full perimeter weather seal to minimize air infiltration.
- Extruded ribs stiffen door, resisting positive/negative air pressure.
- Standard front and top hood, complete with baffle seal.
- 18 and 40 oz fabric in blue, orange or red. 88 oz fabric in blue, tan or grey.
- Options:
 - Full vision door or full fabric door.
 - Heavier ribs for high positive pressure environments.
 - Orange or red 88 oz fabric.

TNR® Drive Features

- High speed frequency drive operator provides quick, quiet, reliable operation.
- Door Speed: Up to 60 inches per second.
- Leading edge technology controller with integrated frequency inverter.
- Smooth start - fast opening - smooth deceleration increases efficiency and extends product life.
- Can be quickly programmed and customized to handle access controls and specialty functions.
- Options: Remote controls, pull cords loop detectors, motion sensors, Plug and Play cabling.

Standard HDF Door Features
Opening Speed —Up to 60 inches per second
Reversing Edge —Pressure sensitive air-wave wireless edge
Control Panel —Self Diagnostic, Inverter Drive soft start, soft stop
Self Supporting Frame —Aluminum Mounting Channel
Warranty — Five years or one million cycles on operator. Two years on parts and workmanship.

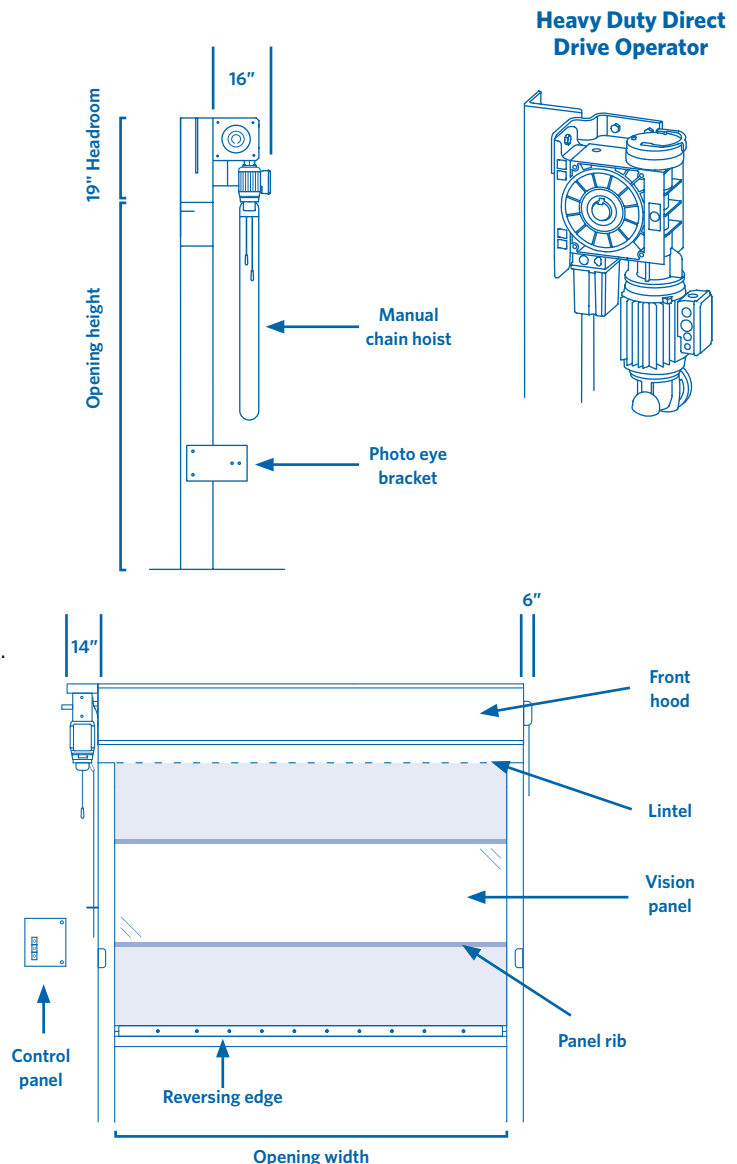

Toll-free 1-866-792-9968 Fax 1-705-735-9564 info@tnrdoors.com TNRdoors.com

